


GB10D2
GB10D4
GB12D2
GB12D4

audiofrog 




Instruction Manual
Mode d'emploi
Manual de instrucciones
Bedienungsanleitung
руководство по
эксплуатации
manual de Instruções
Manuale di istruzioni
Käyttöohje
Gebruiksaanwijzing
Bruksanvisning
Instruktionsbog
Kullanma Kılavuzu
Instrukcja obsługi
Manual Pemilik
使用说明书

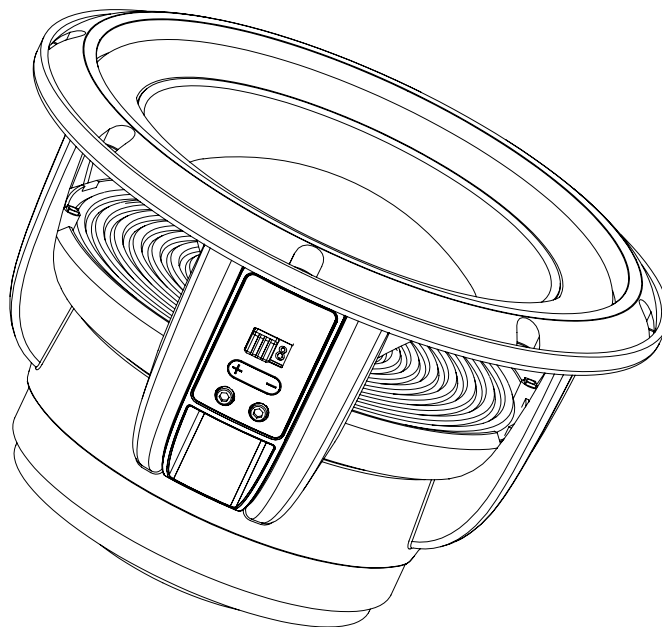



GB10D2
GB10D4
GB12D2
GB12D4



Do not overtighten!
Ne serrez pas trop!
No apriete demasiado!
Nicht zu fest anziehen!
Не затягивайте!
Não aperte demais!
Non stringere troppo!
Älä kiristä liikaa!
Niet te strak aandraaien!
Dra inte åt!
Undgå at overspænde!
Fazla sıkmayın!
Nie należy zbyt mocno!
Jangan kencangkan terlalu banyak!
不要拧得太紧！

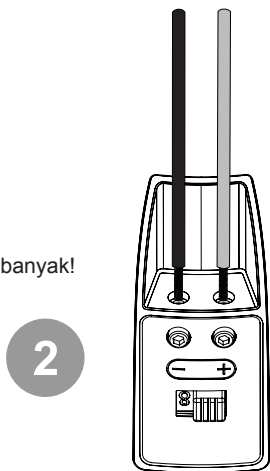


GB10D2
GB12D2




GB10D4
GB12D4


GB10D2
GB10D4

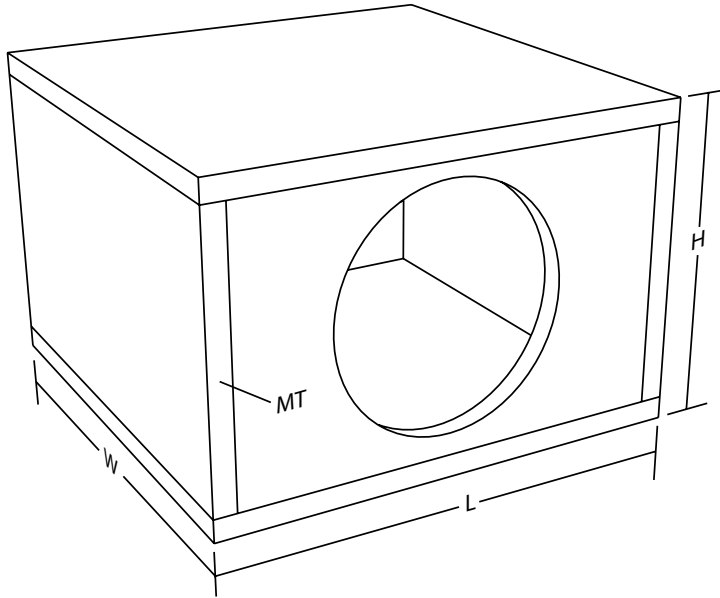

MT..... 19 mm (3/4")
L..... 318 mm (12-1/2")
W..... 305 mm (12")
H..... 305 mm (12")
Vb..... 17 ℓ (0.6 ft³)

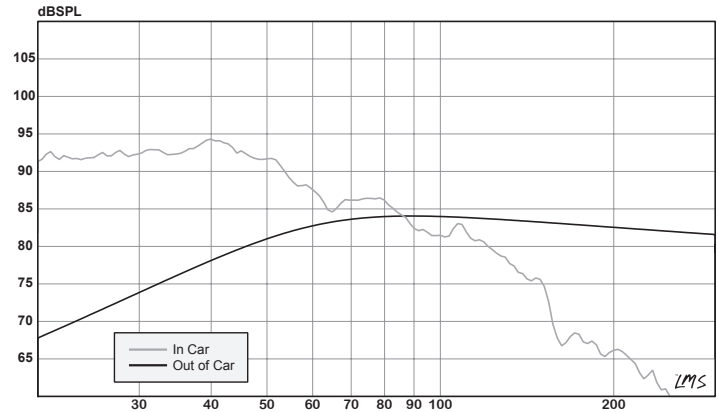


GB10D2
GB10D4

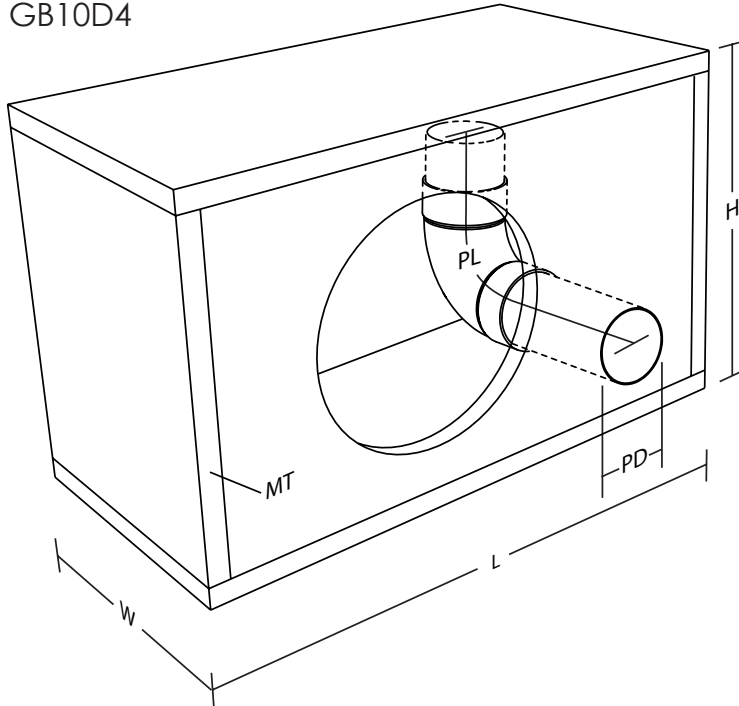


MT..... 19 mm (3/4")
 L..... 445 mm (17-1/2")
 W..... 343 mm (13-1/2")
 H..... 318 mm (12-1/2")
 PD..... 76 mm (3")
 PL..... 330 mm (13")


Vb..... 28.3 ℓ (1 ft³)
 Fb..... 33 Hz

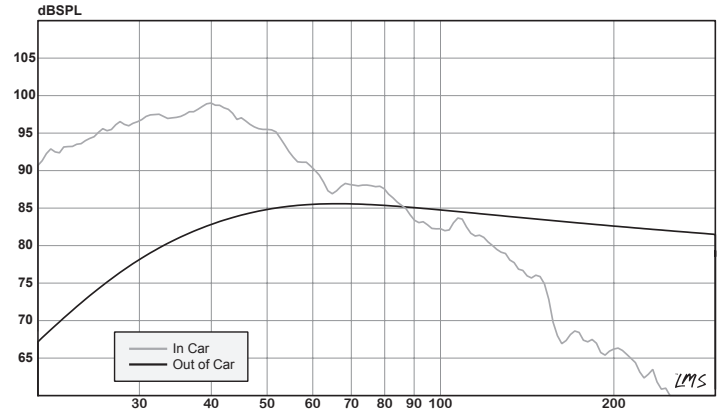


GB10D2
GB10D4

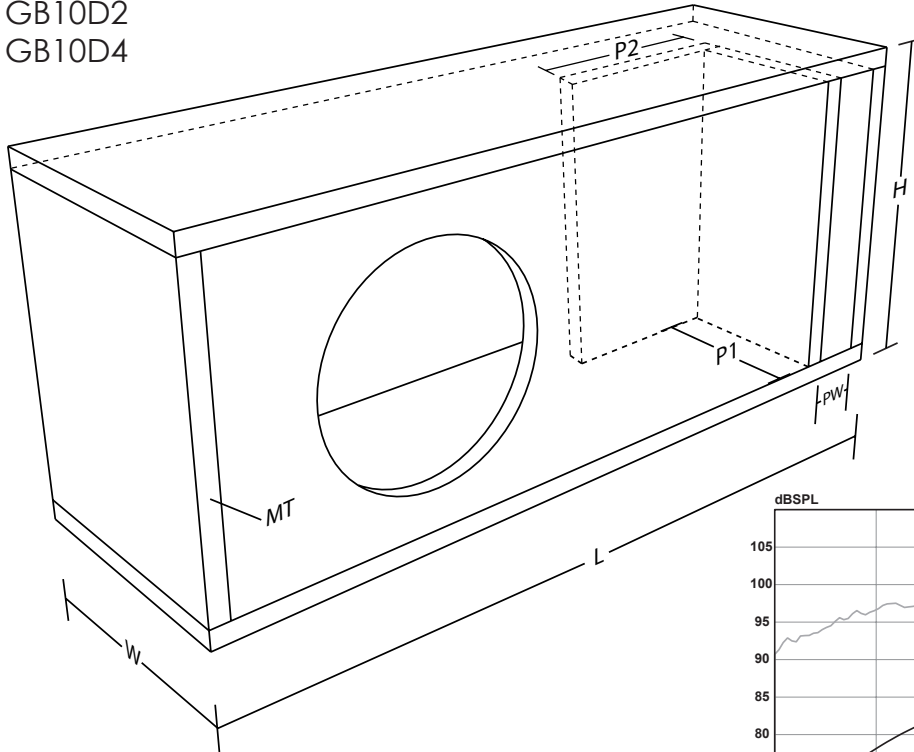


MT.....	19 mm (3/4")
L.....	496 mm (17-1/2")
W.....	343 mm (13-1/2")
H.....	318 mm (12-1/2")
PW.....	25 mm (1")
P1.....	280 mm (11")
P2.....	165 mm (6-1/2")
Vb.....	28.3 ℓ (1 ft ³)
Fb.....	33 Hz

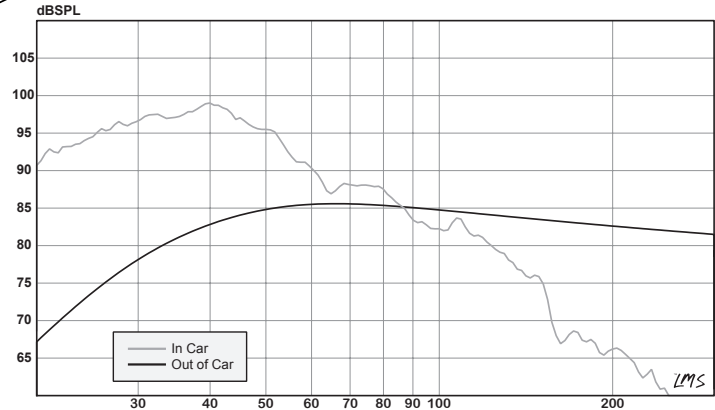


GB12D2
GB12D4

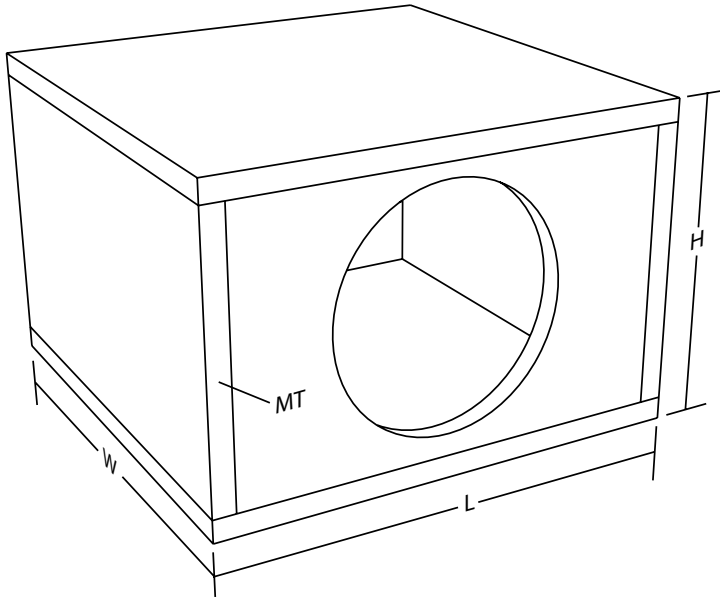


MT..... 19 mm (3/4")
L..... 281 mm (15")
W..... 356 mm (14")
H..... 343 mm (13-1/2")
Vb..... 28.8 l (1.02 ft³)

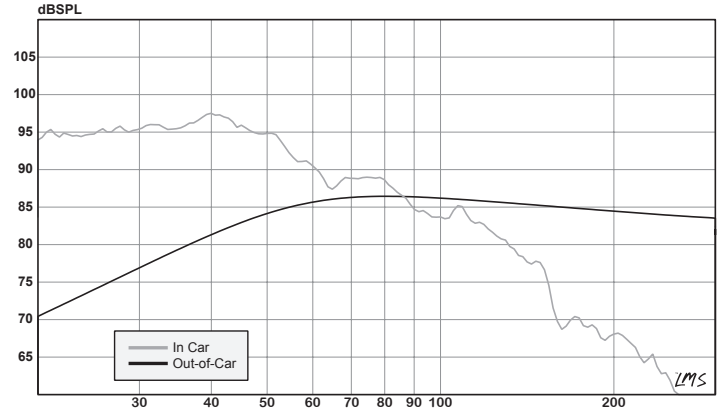


GB12D2
GB12D4

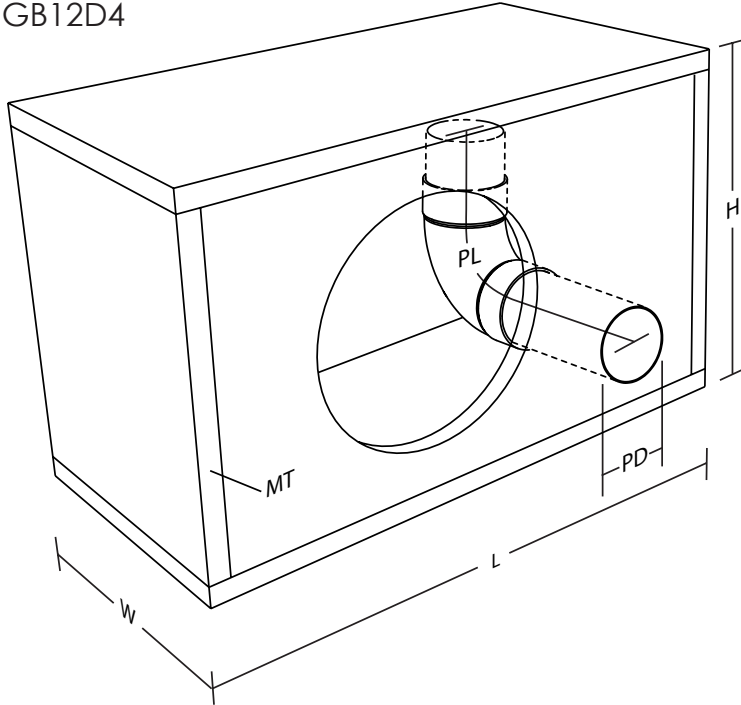

MT.....	19 mm (3/4")
L.....	508 mm (20")
W.....	381 mm (15")
H.....	356 mm (14")
PD.....	102 mm (4")
PL.....	406 mm (16")
Vb.....	42.5 ℓ (1.5 ft ³)
Fb.....	33 Hz

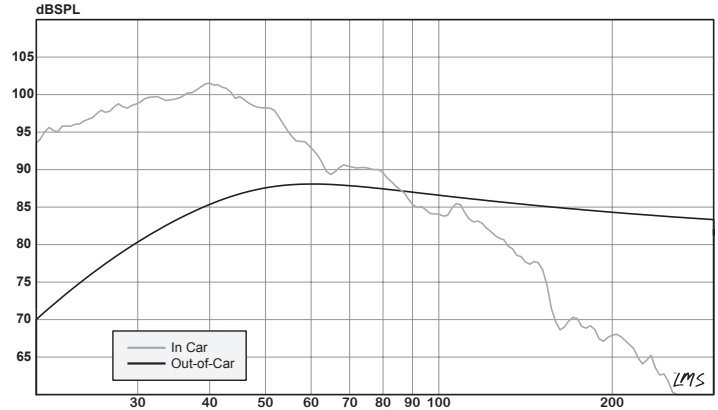


GB12D2
GB12D4

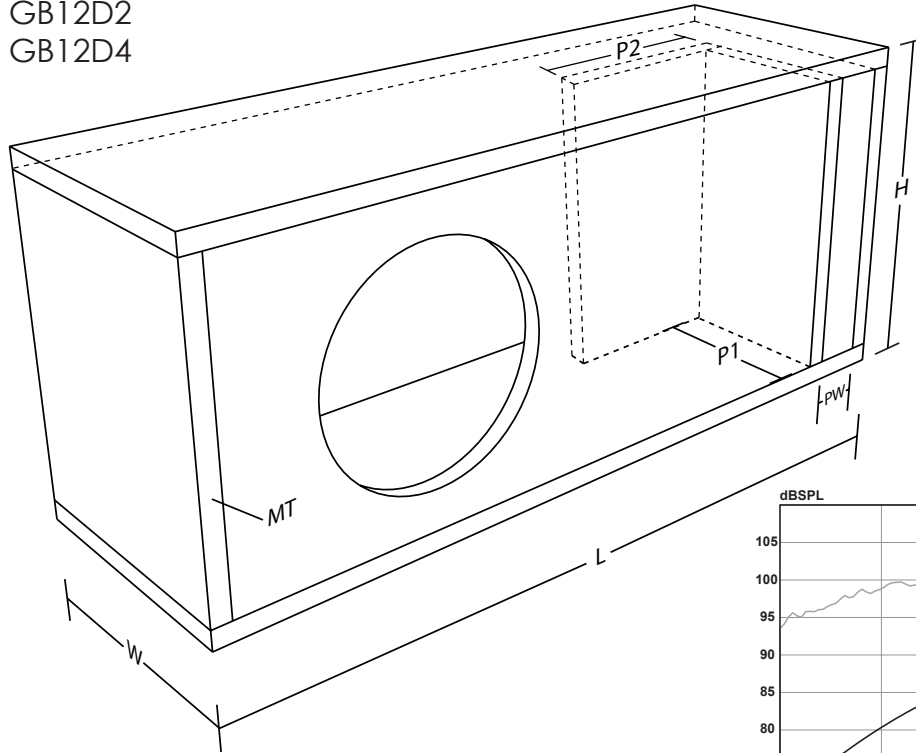

- MT..... 19 mm (3/4")
- L..... 572 mm (22-1/2")
- W..... 381 mm (15")
- H..... 356 mm (14")
- PW..... 38 mm (1-1/2")
- P1..... 305 mm (12")
- P2..... 254 mm (10")

- Vb..... 42.5 l (1.5ft³)
- Fb..... 33 Hz

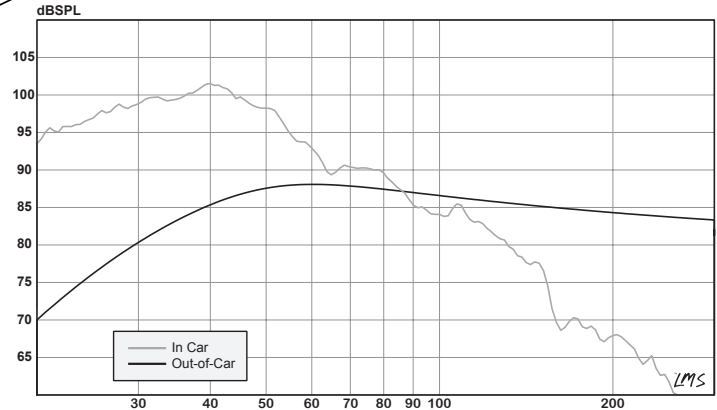


GB10D2 GB10D4

GB10D2



Technical Specifications• Spécifications Techniques•Especificaciones Técnicas•
Technische Daten• Технические характеристики• Especificações Técnicas•
Specifiche Tecniche• Tekniset Tiedot•Technische Specificaties• Tekniska Specifikationer•
Tekniske Spøikationer• Teknik Özellikler• Dane Techniczne• Spesifikasi Teknis• 技术规格




Recommendations• Recommendations• Recomendaciones• Empfehlung•
Рекомендация• Recomendação• Raccomandazione• Suositus• Aanbeveling•
Rekommendation• Anbefaling• Tavsiye• Rekomendacja• Rekomendasi• 推荐


GB10D4



Technical Specifications• Spécifications Techniques•Especificaciones Técnicas•
Technische Daten• Технические характеристики• Especificações Técnicas•
Specifiche Tecniche• Tekniset Tiedot•Technische Specificaties• Tekniska Specifikationer•
Tekniske Spøikationer• Teknik Özellikler• Dane Techniczne• Spesifikasi Teknis• 技术规格



Recommendations• Recommendations• Recomendaciones• Empfehlung•
Рекомендация• Recomendação• Raccomandazione• Suositus• Aanbeveling•
Rekommendation• Anbefaling• Tavsiye• Rekomendacja• Rekomendasi• 推荐

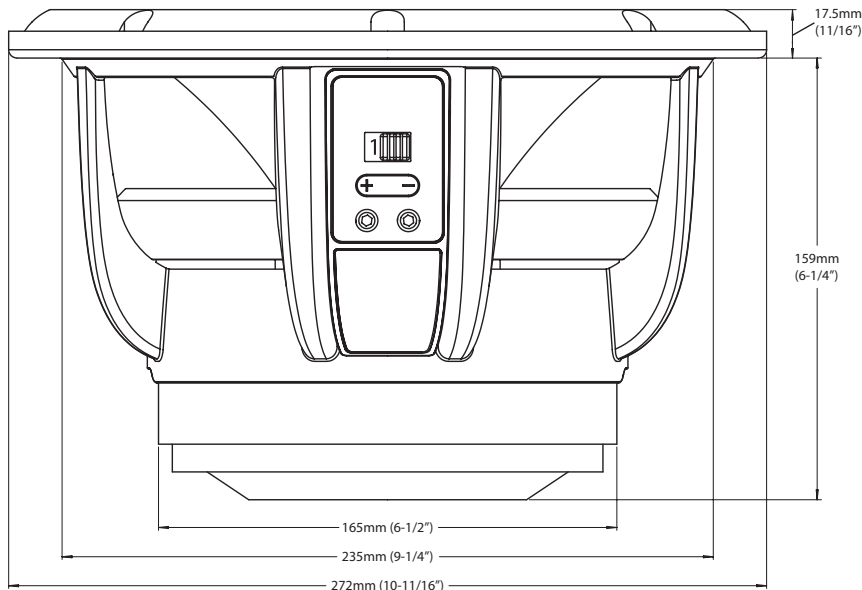


GB12D2

GB12D4

GB12D2



Technical Specifications• Spécifications Techniques•Especificaciones Técnicas•
Technische Daten• Технические характеристики• Especificações Técnicas•
Specifiche Tecniche• Tekniset Tiedot•Technische Specificaties• Tekniska Specifikationer•
Tekniske Specifikationer• Teknik Özellikler• Dane Techniczne• Spesifikasi Teknis•技术规格




Recommendations• Recommendations• Recomendaciones• Empfehlung•
Рекомендация• Recomendação• Raccomandazione• Suositus•Aanbeveling•
Rekommendation• Anbefaling• Tavsiye• Rekomendacja• Rekomendasi• 推荐


GB12D4



Technical Specifications• Spécifications Techniques•Especificaciones Técnicas•
Technische Daten• Технические характеристики• Especificações Técnicas•
Specifiche Tecniche• Tekniset Tiedot•Technische Specificaties• Tekniska Specifikationer•
Tekniske Specifikationer• Teknik Özellikler• Dane Techniczne• Spesifikasi Teknis•技术规格



Recommendations• Recommendations• Recomendaciones• Empfehlung•
Рекомендация• Recomendação• Raccomandazione• Suositus•Aanbeveling•
Rekommendation• Anbefaling• Tavsiye• Rekomendacja• Rekomendasi• 推荐

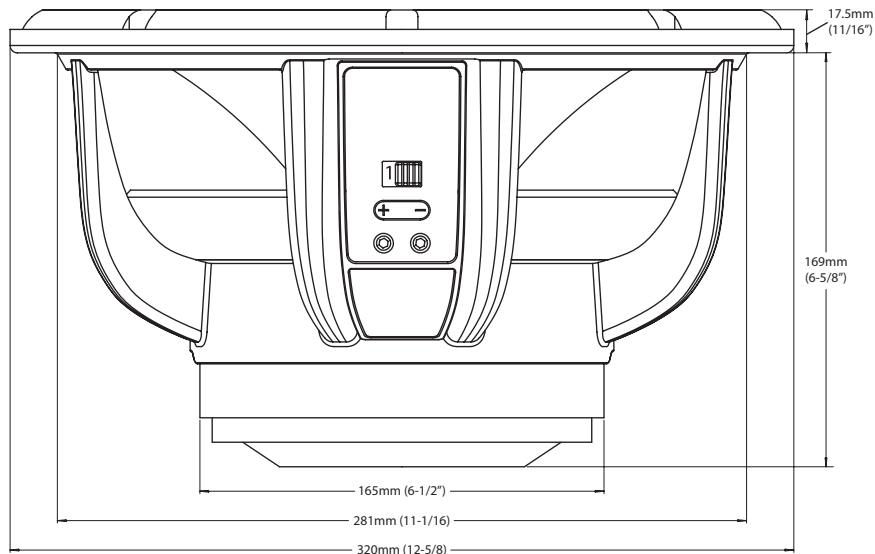

GB10D2
 GB10D4
 GB12D2
 GB12D4

	GB10D2	GB10D4	GB12D2	GB12D4
Revc.....	1 Ω	2 Ω	1 Ω	2.1 Ω
Levc@1kHz.....	0.26 mH	0.57 mH	0.33 mH	0.58 mH
Sd.....	346.3 cm ²	346.4 cm ²	510.7 cm ²	510.7 cm ²
Mmd.....	147 g	141.2 g	183 g	177 g
Mms.....	150.7 g	145 g	189 g	184 g
Cms.....	175 μ m/N	169 μ m/N	153 μ m/N	171 μ m/N
Vas.....	30 ℓ	29 ℓ	57 ℓ	63.7 ℓ
Fs.....	31 Hz	32 Hz	29.5 Hz	28.4 Hz
BL.....	7.65 TM	10.59 TM	8.37 TM	11.47 TM
Qms.....	8.77	8.03	8.44	8.82
Qes.....	0.54	0.54	0.52	0.52
Qts.....	0.51	0.5	0.49	0.49
Xmax (1-way linear).....	17.6 mm (11/16")	19 mm (3/4")	17.6 mm (11/16")	19 mm (3/4")
Voice Coil Diameter.....	76 mm (3")	76 mm (3")	76 mm (3")	76 mm (3")
Basket Displacement.....	3.15 ℓ (0.11cu.ft ³)	3.15 ℓ (0.11 ft ³)	4.17 ℓ (0.147 cu.ft ³)	4.17 ℓ (0.147 cu.ft ³)

Limited Warranty--USA

Audiofrog GB Series products sold in the USA through authorized Audiofrog dealers are warranted to the original purchaser against defects in materials and workmanship for two years after the date of original purchase. They are covered for an additional year if they are installed by an authorized Audiofrog dealer. Please save your receipt. A valid receipt from an authorized Audiofrog dealer is required for warranty service. If you have purchased your GB Series products outside the USA, please consult your local distributor for warranty terms and conditions.

Audiofrog, Inc.
1703 S. Magnolia Ave.
Monrovia, CA 91016
www.audiofrogusa.com

Audiofrog and the Audiofrog logo are trademarks of Audiofrog, Inc, registered in the United States and/or other countries. Audiofrog et le logo sont des marques est une marque commerciale de Audiofrog, Inc déposée aux États-Unis et/ou dans d'autres pays.